



DISPENSERS ST 200 AC

ANTIFREEZE

BIODIESEL

DIESEL

FOOD

GASOLINE

GREASE

KEROSENE

OIL

UREA

WATER

WINDSCREEN

EN. High flow rate portable dispenser unit. ST 200 dispenses diesel fuel at a rate of up to 200 l/min and controls the flow with great precision (+/- 1%) thanks to the oval-gear flow meter (on request).

The low weight of the unit and the possibility of fitting wheels make it easy to handle and suitable for operating on worksites on vehicles with large storage tanks. The unit features a sturdy steel frame.

ES. Unidad móvil de trasiego alta capacidad. ST 200 suministra gasoleo hasta 200 l/min y controla el flujo con precisión (+/- 1%) con el cuentalitro mecánico de engranajes ovalados (a petición).

El peso limitado y la posibilidad de instalar ruedas lo hacen manejables y apto por trasiegos por vehículos con largo tanque en obras.
Con robusto chasis en acero.

PT. Grupo distribuidor portátil de grande capacidad. O ST 200 distribui o combustível Diesel até 200 l/min e controla o fluxo com precisão (+/- 1%), graças ao conta-litros de engrenagens ovais (a pedido).

O peso limitado e a possibilidade de instalar as rodas, o tornam manuseável e adequado para realizar abastecimentos em canteiros, nos veículos com reservatórios apropriados. Dotado de estrutura robusta em aço.


PERFORMANCE

- Flow rate up to 200 l/min
- Continuous AC operation.
- Noise level below 75 dB

- Caudal hasta 200 l/min
- Funcionamiento continuo CA
- Nivel sonoro inferior a 75 dB

- Caudal até 200 l/min
- Funcionamento contínuo AC
- Ruído inferior a 75 dB

DIMENSIONS

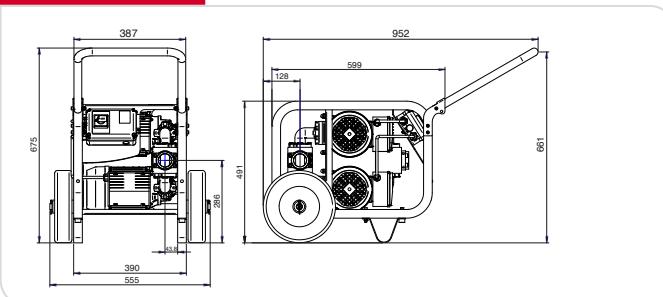


PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
F00315000	46	101	587x395x420	23,1x15,6x16,5	1
F16860000	-	-	-	-	-




Flow-rate
up to
200 l/min
(up to 52,7 gpm)

PIUSI
®

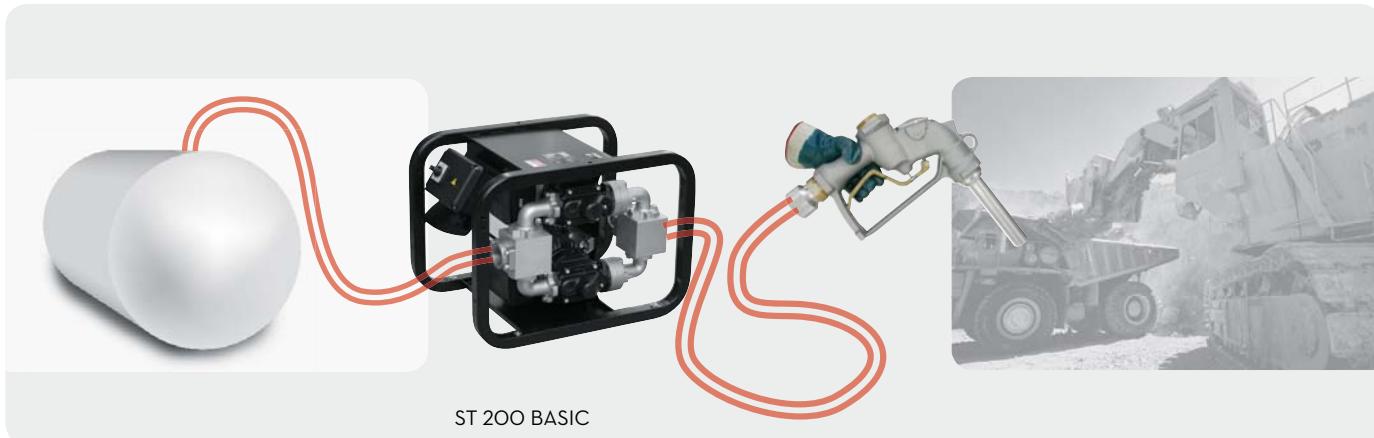

HANDY KIT: version with wheels and handle.

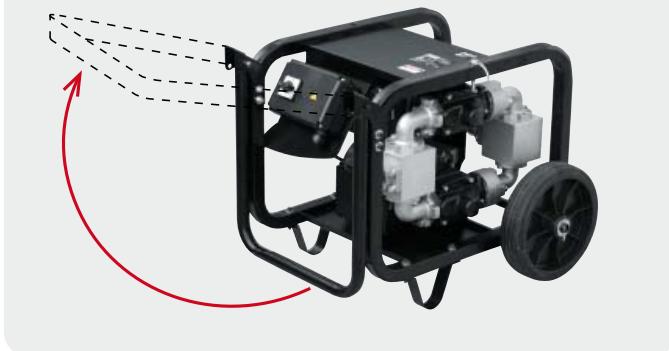

FEATURES



Electric cables
length 6 mt



On/off switch

ON REQUEST



Meter K700 M



Nozzle A280



Hose Kit 1" 1/2

Flow rate:
20-220 l/min
Accuracy: +/- 1%
Oval gear system
Code: FOO540000

Flow rate 280 l/min
with swivel
Code: F13249000

Code: F18798000
(hose 10 mt + Camlock)
Code: F18799000
(hose 20 mt + Camlock)

PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids	Flow-rate		Voltage			Pump		Max pressure	Inlet	
			type	l/min	gpm	AC V./Hz	Power Watt	Amp. max.	mod.	no.	bar	BSP
F00315000	ST 200 BASIC	D	200	52,7	230/50	2050	10		E 120	2	2,5	1" 1/2
F16860000	HANDY KIT (handle + wheels)	D	-	-	-	-	-	-	-	-	-	-

Upon request it is available with different voltages and 60 Hz frequency