

## XB4BP51EX

Complete push button, Harmony XB4, yellow pushbutton Ø22 mm, spring return, 1 NO, ATEX



### Main

|                                 |                        |
|---------------------------------|------------------------|
| Range of product                | Harmony XB4            |
| Product or component type       | Complete push-button   |
| Device short name               | XB4                    |
| Bezel material                  | Chromium plated metal  |
| Fixing collar material          | Zamak                  |
| Head type                       | Standard               |
| Mounting diameter               | 22 mm                  |
| Sale per indivisible quantity   | 1                      |
| Dust zone                       | Zone 21 - 22           |
| Type of operator                | spring return          |
| Operator profile                | Yellow projecting      |
| Operator additional information | Booted (clear silicon) |
| Contacts type and composition   | 1 NO                   |

### Complementary

|                                    |  |
|------------------------------------|--|
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m                                    |
| Device mounting                    | Fixing hole - diameter: 22.5 mm 22.3 +0.4/0 conforming to EN/IEC 60947-1 |
| Fixing center                      | >= 30 x 40 mm (support panel)  |
| Embedding depth                    | 43 mm  |
| Marking                            | Ex tb IIIC   |
| Shape of signaling unit head       | Round  |
| Contact operation                  | Slow-break   |
| Positive opening                   | Without  |
| Operating travel                   | 2.6 mm (NO changing electrical state)<br>4.3 mm (total travel)           |
| Operating force                    | 3.8 N NO changing electrical state                                       |

|  |  |
|--|--|
| Mechanical durability                                    | 5000000 cycles   |
| Connections - terminals                                  | Screw clamp terminals, $\leq 2 \times 1.5 \text{ mm}^2$ with cable end conforming to EN/IEC 60947-1<br>Screw clamp terminals, $1 \times 0.22 \dots 2 \times 2.5 \text{ mm}^2$ without cable end conforming to EN/IEC 60947-1   |
| Tightening torque  | 0.8...1.2 N.m conforming to EN 60947-1   |
| Shape of screw head                                      | Cross compatible with Philips no 1 screwdriver<br>Cross compatible with pozidriv No 1 screwdriver<br>Slotted compatible with flat $\varnothing 4 \text{ mm}$ screwdriver<br>Slotted compatible with flat $\varnothing 5.5 \text{ mm}$ screwdriver  |
| Contacts material  | Silver alloy (Ag/Ni)   |
| Short-circuit protection                                 | 10 A cartridge fuse type gG conforming to EN/IEC 60947-5-1   |
| [I <sub>th</sub> ] conventional free air thermal current | 10 A conforming to EN/IEC 60947-5-1  |
| [U <sub>i</sub> ] rated insulation voltage               | 600 V (pollution degree 3) conforming to EN/IEC 60947-1  |
| [U <sub>imp</sub> ] rated impulse withstand voltage      | 6 kV EN/IEC 60947-1  |
| [I <sub>e</sub> ] rated operational current              | 3 A at 240 V, AC-15, A600 conforming to EN/IEC 60947-5-1<br>6 A at 120 V, AC-15, A600 conforming to EN/IEC 60947-5-1<br>0.1 A at 600 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>0.27 A at 250 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>0.55 A at 125 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>1.2 A at 600 V, AC-15, A600 conforming to EN/IEC 60947-5-1   |
| Electrical durability                                    | 1000000 cycles AC-15, 2 A at 230 V, operating rate $<3600 \text{ cyc/h}$ , load factor: 0.5 conforming to EN/IEC 60947-5-1: appendix C<br>1000000 cycles AC-15, 3 A at 120 V, operating rate $<3600 \text{ cyc/h}$ , load factor: 0.5 conforming to EN/IEC 60947-5-1: appendix C<br>1000000 cycles AC-15, 4 A at 24 V, operating rate $<3600 \text{ cyc/h}$ , load factor: 0.5 conforming to EN/IEC 60947-5-1: appendix C<br>1000000 cycles DC-13, 0.2 A at 110 V, operating rate $<3600 \text{ cyc/h}$ , load factor: 0.5 conforming to EN/IEC 60947-5-1: appendix C<br>1000000 cycles DC-13, 0.5 A at 24 V, operating rate $<3600 \text{ cyc/h}$ , load factor: 0.5 conforming to EN/IEC 60947-5-1: appendix C |
| Electrical reliability                                   | $\Lambda < 10\text{exp}(-6)$ at 5 V, 1 mA in clean environment conforming to EN/IEC 60947-5-4<br>$\Lambda < 10\text{exp}(-8)$ at 17 V, 5 mA in clean environment conforming to EN/IEC 60947-5-4  |

## Environment

|                                       |  |
|---------------------------------------|--|
| Protective treatment                  | TH   |
| Ambient air temperature for storage   | -40...70 °C  |
| Ambient air temperature for operation | -40...70 °C  |
| Overvoltage category                  | I conforming to IEC 60536  |
| IP degree of protection               | IP66 conforming to IEC 60529<br>IP67   |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X   |
| IK degree of protection               | IK03 conforming to IEC 50102   |
| Standards                             | EN 50014<br>EN 50281-1-1<br>IEC 61241-0<br>IEC 61241-1   |
| Directives                            | 94/9/EC - ATEX directive   |
| Product certifications                | GL<br>DNV<br>INERIS 04ATEX9004U  |
| Vibration resistance                  | 5 gn ( $f = 2 \dots 500 \text{ Hz}$ ) conforming to IEC 60068-2-6  |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.091 kg |
| Package 1 Height | 0.880 dm |
| Package 1 width  | 0.540 dm |
| Package 1 Length | 0.340 dm |

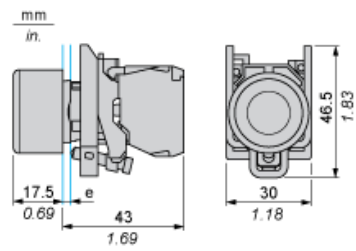
### Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                           |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile        | <a href="#">End of Life Information</a>   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

### Contractual warranty



|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Pushbutton



e : support thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board   | Connection by Faston Connectors  |
|---|--|
|    |  |
| <p>(1) Diameter on finished panel or support<br/>           (2) 40 mm min. / 1.57 in. min.<br/>           (3) 30 mm min. / 1.18 in. min.<br/>           (4) <math>\text{Ø } 22.5 \text{ mm} / 0.89 \text{ in. recommended } (\text{Ø } 22.3 \text{ mm }_0^{+0.4} / 0.88 \text{ in. }_0^{+0.016})</math><br/>           (5) 45 mm min. / 1.78 in. min.<br/>           (6) 32 mm min. / 1.26 in. min.</p> |  |