




Grounding monitor

Groundex Serie

Ex Atex IP66

**An ideal solution for
avoid explosions**

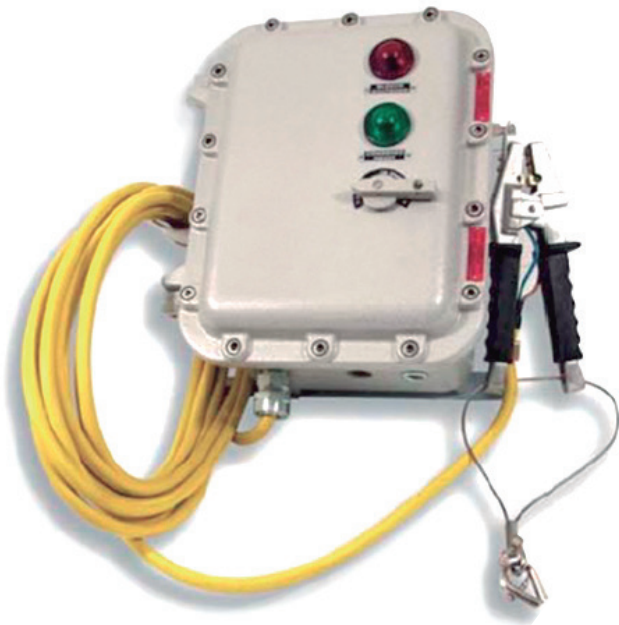

Monitor electronic ground start, ideal for areas that may be present an explosive atmosphere, electrostatic discharge can trigger a fire or explosion.

Zones: 1, 2, 21 and 22

The transfer of flammable liquids is an operation in which these factors and essential protection measure is usually present grounding of tank trucks, drums, containers and equipment.






Grounding monitor

Groundex Serie

Ex Atex IP66

Zones: 1, 2, 21 and 22

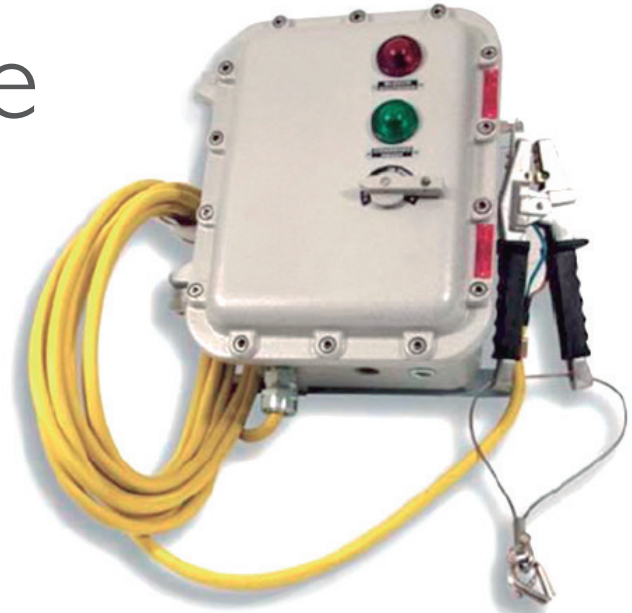

TECHNICAL DATA

- **Voltages:**
AC 220V 50/60Hz
OPTION: Other voltages on request
- **Protection type:**
IP-66
- **Certificates:**
According to ATEX directive 94/9 / EC:
CESI 02 ATEX 073
- **Protection mode:**
Ex II 2G EExd IIBT5 Ex II 2D IP-6xT 100°C
Suitable for Zones 1, 2, 21 and 22.
- **Input / Output:**
3 x 3/4* GK

OPTIONS

- Anticondensation innerliner
- Drainage and ventilation valve

ADVANTAGES

- Body and cover In low copper content aluminium alloy.
- Stainless steel cover bolts.
- Pintura EPOXY RAL-7035.
- Internal/external earth screw.
- Fixing lugs.
- Connecting clamp complete with 8 meters of cable.
- Selector insertion, red "stop" light and green "go" light.
- Internal electronic earthing system.
- Nickel plated brass cable gland.
- Ral 7035 epoxy coating.




Grounding monitor

Groundex Serie

Ex Atex IP66

Zones: 1, 2, 21 and 22

TECHNICAL SPECIFICATIONS

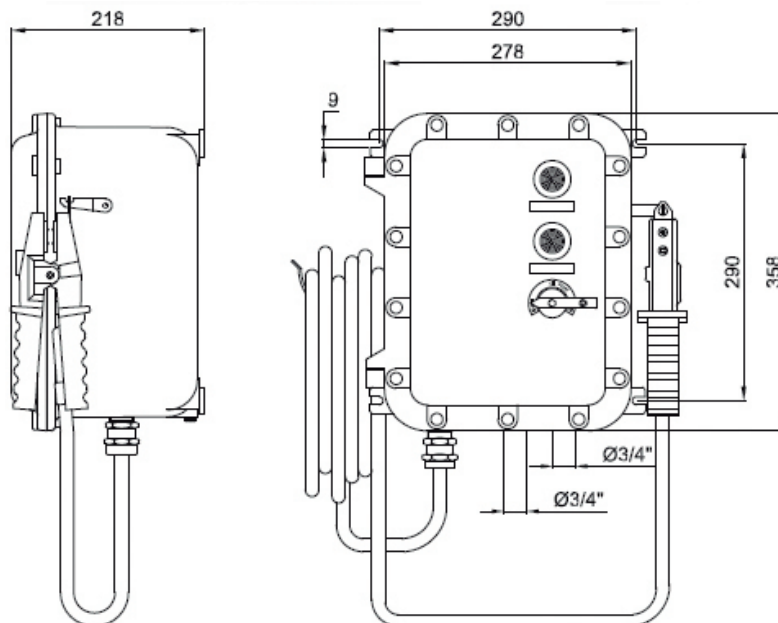

REFERENCES

REFERENCE	FEEDING	FREQUENCY	WEIGHT KG
SPT352921A	230V	50 / 60 Hz	20
SPT352921B	110V	50 / 60 Hz	20
SPT352921E	24V	50 / 60 Hz	20