

ANTIFREEZE
BIO DIESEL
DIESEL
FOOD
GASOLINE
GREASE
KEROSENE
OIL
UREA
WATER
WINDSCREEN

K MECHANICAL METERS

33 - K44



Mechanical meters. Designed to measure the exact quantity of dispensed liquid (fuel or lubricant) for non commercial use. Reliable, economical and easy to install and calibrate on site. Also gravity functional thanks to reduced resistance to flow.



Model K33, 3 digit partial totals (max 999 litres), 6 digit totals.

Model K44, 4 digit partial totals (max 9999 litres), 7 digit totals.

Mod. Pulsar: "Open collector" card type, frequency 10 pulses/litre, power supply 6-24 V DC, max 10 mA.




PERFORMANCE

- Flow rates 20 - 120 l/min
- Accuracy +/- 1%
- Repeatability 0.2 %
- Max. operating pressure 10 bar
- Bursting pressure 30 bar

Flow-rate
up to
120 l/min

Accuracy
+/-
1 %

DIMENSIONS

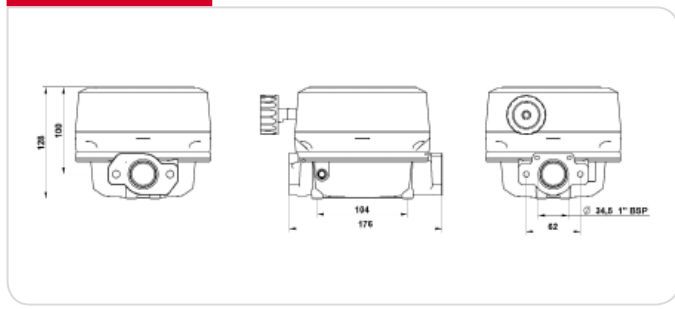

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
000550000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000551000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000552000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000553000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000560000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000561000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000562000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000563000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000700000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000553130	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000710000	0,6	1,3	180x180x170	7,1x7,1x6,7	1
000563080	0,6	1,3	180x180x170	7,1x7,1x6,7	1
00056500A	0,6	1,3	180x180x170	7,1x7,1x6,7	1

PRODUCTS' RANGE TECHNICAL DATA

Code	Code	Description	Flow direction	Flow-rate		Pressure		Pulsar	Inlet Outlet
				l/min	gpm	bar	psi		
000550000	000550160	K33 Ver. A	←	20 - 120	5 - 32	10	142	-	1" BSP
000551000	000551160	K33 Ver. B	↑	20 - 120	5 - 32	10	142	-	1" BSP
000552000	000557000	K33 Ver. C	↓	20 - 120	5 - 32	10	142	-	1" BSP
000553000	000558000	K33 Ver. D	→	20 - 120	5 - 32	10	142	-	1" BSP
000560000	000560160	K44 Ver. A	←	20 - 120	5 - 32	10	142	-	1" BSP
000561000	000561020	K44 Ver. B	↑	20 - 120	5 - 32	10	142	-	1" BSP
000562000	000562020	K44 Ver. C	↓	20 - 120	5 - 32	10	142	-	1" BSP
000563000	000563020	K44 Ver. D	→	20 - 120	5 - 32	10	142	-	1" BSP
000700000	-	K33 Ver. A GAL/NPT	←	20 - 120	5 - 32	10	142	-	1" NPT
000553130	-	K33 Ver. D GAL/NPT	→	20 - 120	5 - 32	10	142	-	1" NPT
000710000	-	K44 Ver. A GAL/NPT	←	20 - 120	5 - 32	10	142	-	1" NPT
000563080	-	K44 Ver. D GAL/NPT	→	20 - 120	5 - 32	10	142	-	1" NPT
00056500A	-	K44 / Pulsar	→	20 - 120	5 - 32	10	142	10 (38)	1" BSP"